




Cable Hoists

Designed for Reliability,
Durability and Versatility

Get A Grip on Little Mule's Cable Hoists. Recent refinements in design and construction make this the best portable cable hoist in the market. Little Mule Cable Hoists are a great investment in lasting and dependable service *plus* value.

- **Capacities** — Rated loads of 1000, 1500 and 2000 lbs. - single line; 2000, 3000 and 4000 lbs. - double line.
- **Handle Designed for Overload Protection** — Handle bends to warn of hazardous condition and prevents dangerous overload.
- **Hooks with Latches** — 360° swiveling hooks equipped with latches for positive load engagement.
- **Positive Load Holding in All Environments** — Double, interlocking pawl mechanism assures one pawl is engaged at all times.
- **Meets or Exceeds** — Minimum 4:1 design factor and all requirements of ASME/ANSI Standard B-30.21. All units tested at 125% of rated load.
- **Lightweight and Rugged** — Special cast aluminum and zinc alloy housings.
- **Heavy-Duty Cable** — Utilizes preformed and galvanized, extra-flexible aircraft cable. Stainless steel cable available—suitable for marine environments.
- **Corrosion Resistant** — All stainless steel springs and shafts.
- **Reduced Wear** — All rotating shafts are mounted on bronze bushings.
- **Self-Storing Cable Drum** — Provides compact operation.
- **Easy Load Positioning** — Utilizes a double pawl system with multiple pawl stops for precise load adjustment.
- **Fast Cable Take-Up** — Winding wheel provided for quick take-up or positioning of cable.
- **Open Construction** — Allows for easy cleaning and inspection.
- **Versatile** — 430CDPB equipped with oversized slip hooks—Ideal for opening and closing boxcar doors.

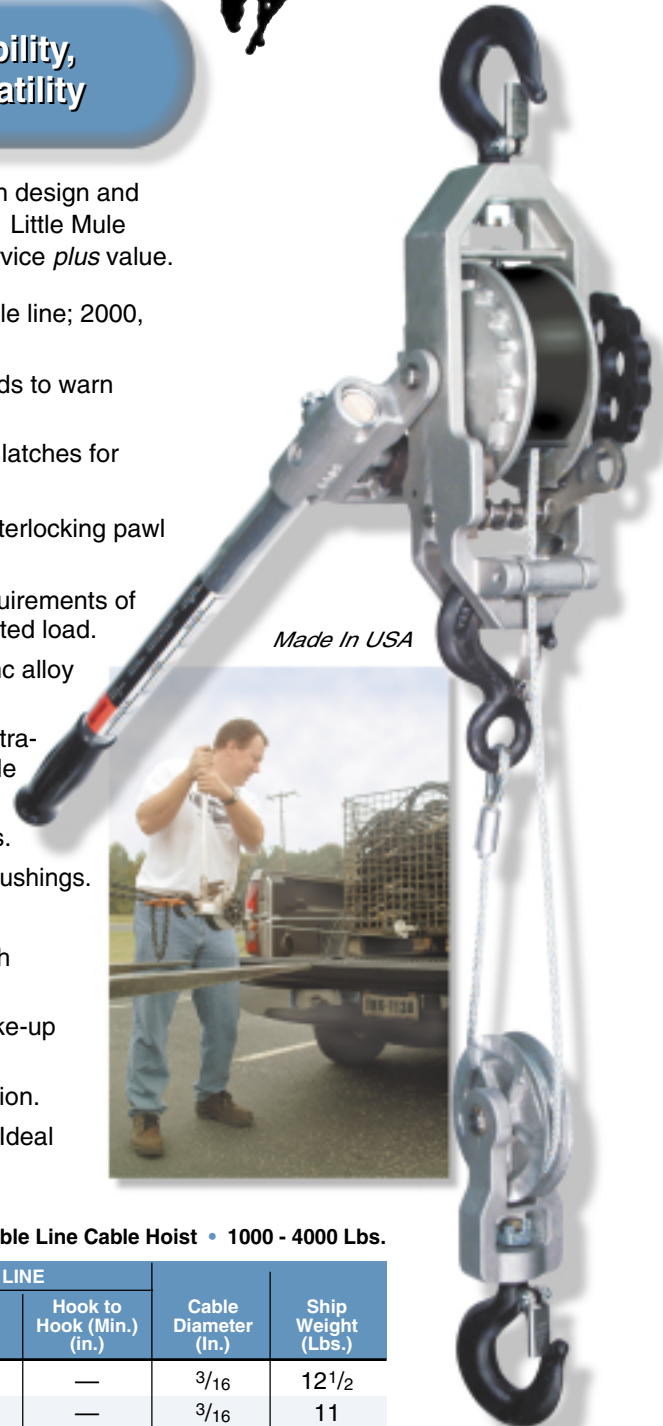


S P E C I F I C A T I O N S

Single & Double Line Cable Hoist • 1000 - 4000 Lbs.

Model Number	SINGLE LINE			DOUBLE LINE			Cable Diameter (In.)	Ship Weight (Lbs.)
	Capacity (Lbs.)	Lift (Ft.)	Hook to Hook (Min.) (In.)	Capacity (Lbs.)	Lift (Ft.)	Hook to Hook (Min.) (in.)		
105SB	1000	40	20	—	—	—	3/16	12 1/2
115SB	1000	23	20	—	—	—	3/16	11
115DB	1000	23	20	2000	11 1/2	27	3/16	14
505NB	1500	17	20	—	—	—	1/4	11 1/2
202WNB	1500	17	20	3000	9	27	1/4	14
434WNB	1500	22	20	3000	11	27	1/4	15 1/4
430CDPB	1500	22	20	3000	11 1/4	27	1/4	17
404WNB	2000	17	20	4000	8 1/2	27	9/32	16 1/2
404WNB/MC	2000	17	20	4000	8 1/2	27	9/32	16 1/2

DIMENSIONAL DRAWING

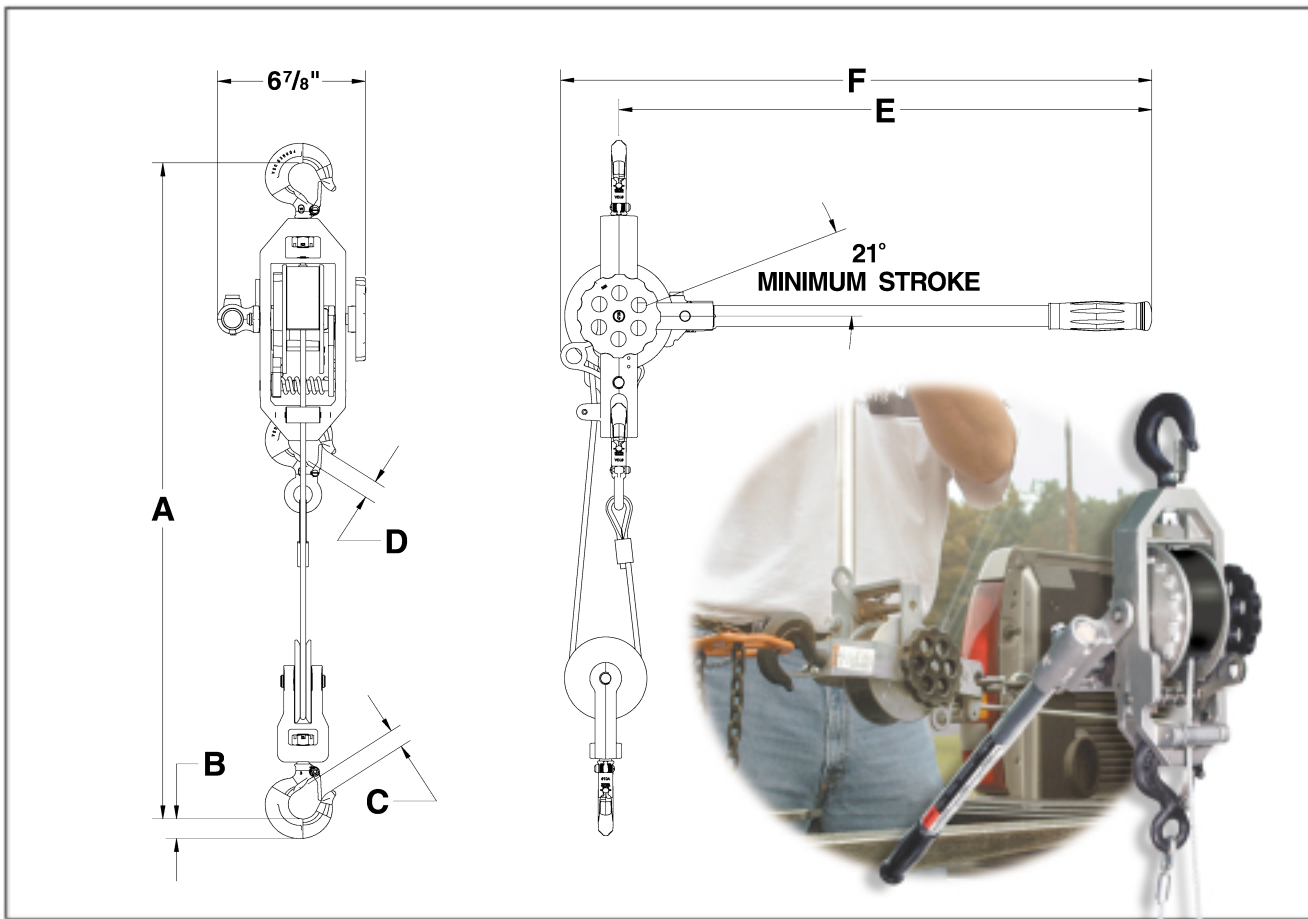

Model Number	A		B	C	D	E	F
	Single Line	Double Line					
105SB	20	—	15/16	1	1	17 1/8	197/8
115SB	20	—	15/16	1	1	17 1/8	197/8
115DB	20	27	15/16	1	1	17 1/8	197/8
505NB	20	—	15/16	1	1	21 1/8	237/8
202WNB	20	27	15/16	1	1	21 1/8	237/8
434WNB	20	27	15/16	1	1	21 1/8	237/8
430CDPB	20	30	13/16	1 1/4	1 1/4	21 1/8	237/8
404WNB	20	27	1 1/16	1 1/16	1	25 1/8	277/8
404WNB/MC	20	27	1 1/16	1 1/16	1	25 1/8	277/8

Note: All Dimensions in Inches
Upper hook and idler hook are the same, except on 430CDPB

Authorized Sales & Service
J. HERBERT CORPORATION
 Call 1-800-255-0588
 407-846-0588 Fax: 846-1066
 info@jherbertcorp.com

Visit us online:
www.jherbertcorp.com

Products To Pull You Through The Tough Jobs



⚠ WARNING

Overloading and Improper Use Can Result In Injury

To Avoid Injury:

- Do not exceed working load limit, load rating, or capacity.
- Do not use to lift people or loads over people.
- Use only alloy chain and attachments for overhead lifting.
- Read and follow all instructions.

Country Club Road • PO Box 779
Wadesboro, NC 28170 USA

Phone: (800) 477-5003 (704) 694-2156
FAX: (800) 374-6853 (704) 694-6829
e-mail: coffing@cmworks.com
www.coffinghoists.com