


Wire Rope Lever Tool For Long Distance Pulling Applications

GT Series Grip & Pull Lever Tool



The **GT Grip and Pull Wire Rope Lever Tool** is a rugged and portable unit designed for heavy duty pulling, rigging, dragging, and stretching applications. Its ability to grip and pull heavy loads over long distances specially suit this tool for use in the construction and transportation industries, as well as hundreds of other industrial applications.

- **Capacities and Reach** - Rated loads from 1 to 3 tons, with standard wire rope length of 32 feet on 1 and 3 ton models; 65 feet on 2 ton model.
- **Smooth Operation / Low Wear** - The large surface area of the dual clamping jaws provide an evenly distributed grip on the wire rope for smooth operation and low wear.
- **Positive Load Control** - The greater the force of the pull, the greater the clamping force of the jaws. Unique jaw design prevents damage to the wire rope.
- **Limitless Wire Rope Travel** - Versatility for use over long distances.
- **Durability** - Lightweight and compact design for portability, yet built tough for long life and trouble-free service.
- **Overload Protection** - Easily replaceable, shear pin design to protect against dangerous overloads.
- **Telescopic Handle** - Enhances portability and ease of operation.
- **Minimal Maintenance** - Periodic cleaning, inspection, and lubrication is all that is required.
- **Lifetime Warranty** - Lifetime warranty against defects in materials and workmanship. Refer to full Coffing Warranty Statement for details.

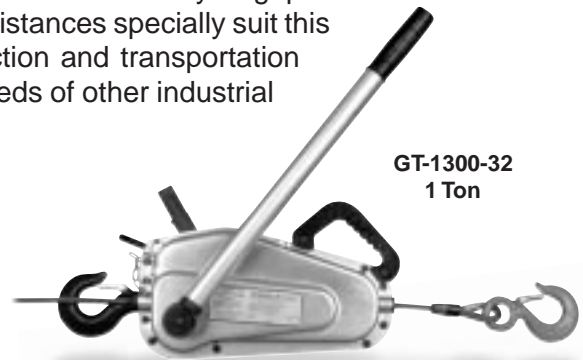

SPECIFICATIONS

GT Series

Grip and Pull Wire Rope Lever Tool



GT-1300-32

GT-2000-65

GT-3500-32

Rated Capacity (Tons)	Model Number	Product Code	Standard Wire Rope Length (Ft.)	Wire Rope Diam. (In.)	Lever Length Extended (In.)	Lever Length Retracted (In.)	Rope Advance† (In.)	Overall Dimensions (In.)	Net Weight* (Lb.)	Net Weight** (Lb.)
1	GT-1300-32	0013	32	5/16	29.1	21.3	1.30	19.7 x 9.1 x 4.0	35	18
2	GT-2000-65	0020	65	7/16	29.1	21.3	1.45	24.8 x 13.0 x 5.9	79	40
3	GT-3500-32	0035	32	5/8	29.1	21.3	0.78	28.6 x 12.8 x 7.0	94	66

† Per Full Stroke at Rated Load

* Wire Rope Included

** Less Wire Rope

Coffing Industrial Warranty

All Coffing units are thoroughly inspected and performance tested prior to shipment. If any properly maintained unit develops a performance problem due to a material or workmanship defect, as verified by Coffing Hoists, repair or replacement of the unit will be made to the original purchaser without charge. This repair / replacement policy applies only to the industrial line of units installed, maintained, and operated as outlined in the applicable accompanying Coffing manual, and specifically excludes normal wear, abuse, improper installation, improper or inadequate maintenance, hostile environmental effects, and unauthorized repairs / modifications.

WARNING

IMPROPER USE OF GT GRIP AND PULL LEVER TOOL CAN RESULT IN INJURY

TO AVOID INJURY:

- Do not use as a hoist for overhead lifting.
- Do not use to lift people or to suspend loads over people.
- Use only if properly trained and authorized to do so.

Authorized Sales & Service

J. HERBERT CORPORATION

Call 1-800-255-0588

407-846-0588 Fax: 846-1066

info@jherbertcorp.com

Visit us online:

www.jherbertcorp.com

High Performance Lifting™

COFFING®

HOISTS

Country Club Road • PO Box 779

Wadesboro, NC 28170 USA

Phone: (800) 477-5003 (704) 694-2156

FAX: (800) 374-6853 (704) 694-6829